


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作


由 Autodesk 教育版产品制作

1	2	3	4	5	6	7
				版本	变更原因	日期
						姓名

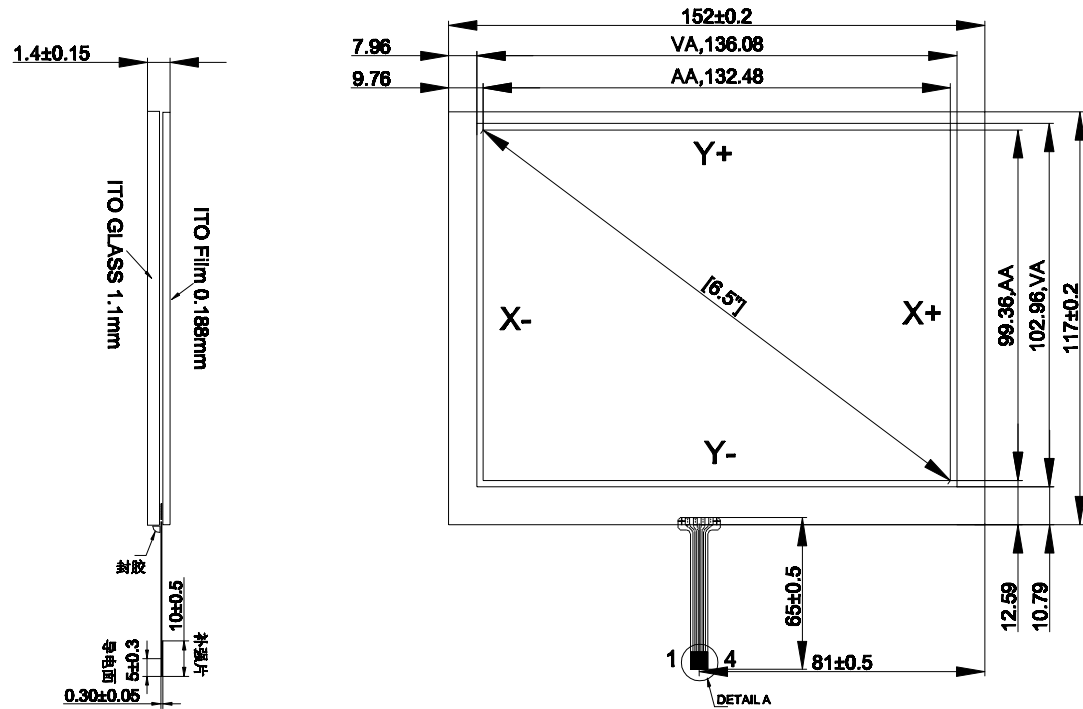


Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:-10 °C~60 °C
Storage Temperature:-20 °C~70 °C
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:360Ω-880Ω Y:203Ω-495Ω

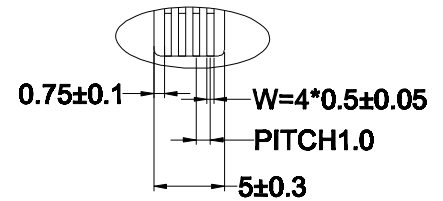

DetailA

PIN #	Assignment
1	Y+
2	X-
3	Y-
4	X+



TOLERANCES
(UNLESS OTHERWISE STATED)

DECIMALS	ANGLES	±0.5%
>2000MM	±2.00MM	
1600< X ≤2000MM	±1.20MM	
1200< X ≤1600MM	±0.80MM	
800< X ≤1200MM	±0.50MM	
400< X ≤800MM	±0.40MM	
120< X ≤400MM	±0.30MM	
30< X ≤120MM	±0.20MM	
<30MM	±0.10MM	

格林触控 GreenTouch		Shenzhen GreenTouch Technology Co.,Ltd			
Model No.:	GT-4W-65A-1	Size	6.5"	Ratio	4:3
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.8.5	Page	1/1
Check	付作伟	Date	2015.8.5	Version	A0
Release	汪陈	Date	2015.8.5		