
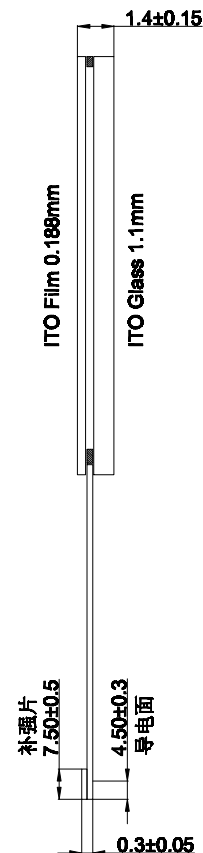
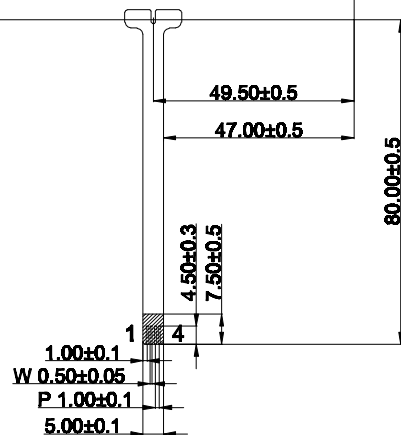
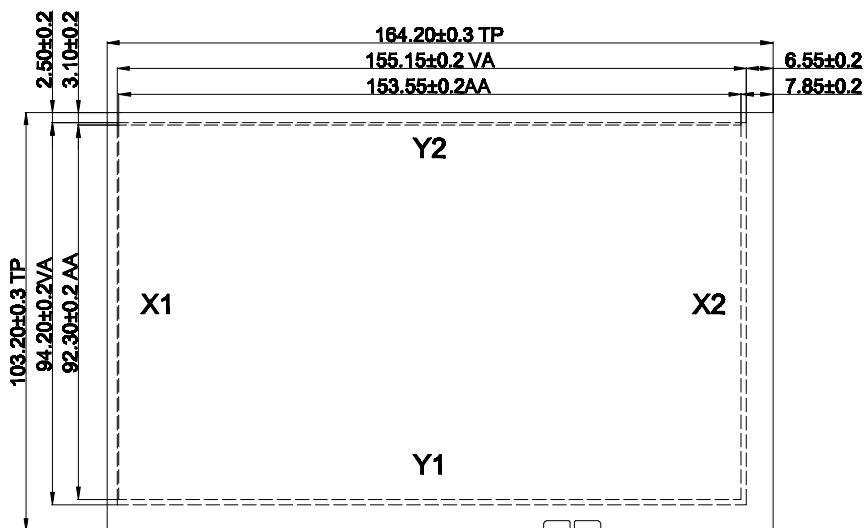


版本	变更原因	日期	姓名

Logic:

Pin#	Assignment
Pin1	X1
Pin2	Y1
Pin3	X2
Pin4	Y2



Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10v
- 3.Operation Temperature:-20℃~70℃  
Storage Temperature:-40℃~80℃
- 4.Life Time:1.000.000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:30g~120g
- 11.Resistance:X:400Ω-1100Ω Y:100Ω-500Ω

TOLERANCES (UNLESS OTHERWISE STATED)	
DECIMALS	ANGLES ±0.6°
>2000MM	±2.00MM
1600< X ≤2000MM	±1.20MM
1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM



Shenzhen GreenTouch Technology Co.,Ltd

Model No.:	GT-4W-7H-1	Size	7"	Ratio	16:9
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2016.4.20	Page	1/1
Check	付作书	Date	2016.4.20	Version	A0
Release	汪燕	Date	2016.4.20	⊕	